


Encombrement de la gamme d'enrouleurs Flat Deck / *FD Range dimensions*

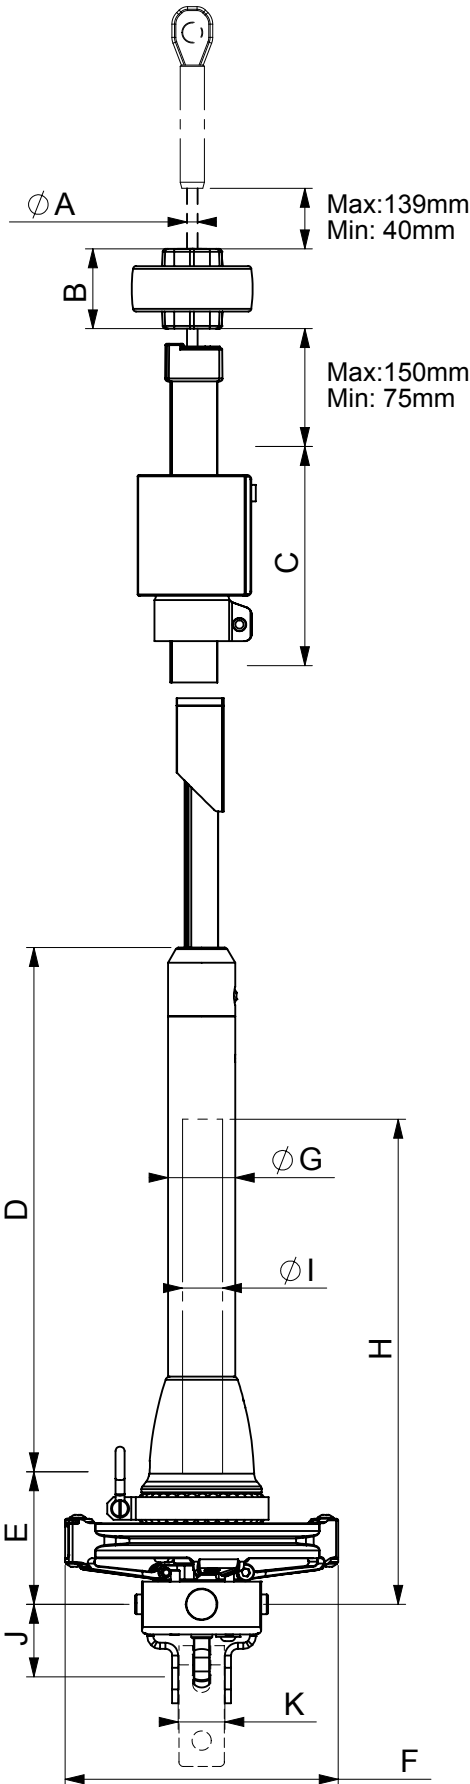

Modèle/ model (dim. mm)	FD090/SX25 FD110/R14	FD170/SX33 FD190/R24	FD210/SX39 FD230/R26	FD280/SX47 FD310/R34
ØA max œil dem/ridoir remov. eye/turnb	7 (R14) 5 (SX25)	8 (R24) 7 (SX33)	10	12 (R34) 14 (SX47)
B	53	53	53	53
C	140	148	178	205
D	342	466	466	634
E	88	92	92	105
F	182	232	232	282
ØG	45	60,5	60,5	72,5
H	332	459	459	632
ØI	28	42	42	50
J1 (STD)	48 (89015409019)	66 (89015411120)	66 (89015411120)	77 (89015411426)
J2 (Option)	100 (09183110019)	150 (09183315019)	150 (09183315019)	150 / ØA 12max (09183315019)
J3 (Option)	200 (09183120019)	200 (09183320019)	200 (09183320019)	200 / ØA 12max (09183320019)
J4 (Option)		250 (09183325019)	250 (09183325019)	250 / ØA 12max (09183325019)
K	30	40	40	60
Ø cage ridoir max	24	38	38	46

\* H, I : Espace disponible dans le tambour pour le ridoir  
*Available space for the turnbuckle inside the drum*